


Sling Saver Web Connector

Sling Saver Load Rated **"QT"**
QUENCHED & TEMPERED

S-280



- All Alloy construction.
- Durable vinyl cover that:
 - Protects sling at eye
 - Keeps sling positioned correctly on spool.
- Design Factor of 5 to 1.
- Connects Synthetic Web and Synthetic Round Slings to conventional Crosby hardware including:
 - 320N Eye Hook
 - Additional Crosby Grade 8 Fittings
 - Master Links
 - Rings
 - Shackles
- Makes a field assembled bridle quick and easy.
- No cotter pin to snag sling material.
- Increased radius of spool gives wider sling bearing surface resulting in an increased area for load distribution, thus:
 - Increasing Synthetic Sling efficiency as compared to standard anchor and chain shackle bows and conventional eye hooks. This allows 100% of the slings rated Working Load Limit to be achieved.
 - Allowing better load distribution on internal fibers.
- Replacement kit for spool and web cover available.
- Designed for use with Type III (Eye & Eye), Class 7, 2 ply webbing & Synthetic Round Slings. Also accommodates single ply and endless slings.

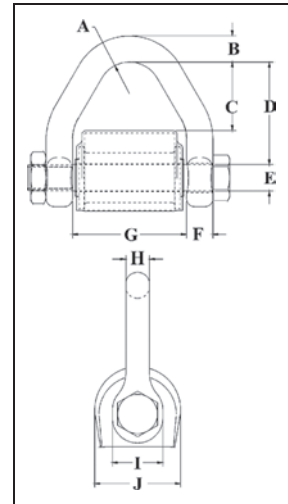

WARNING

- A falling load may cause serious injury or death.
- Read, understand and follow all instructions and chart information before using web connectors.
- Before use, tighten bolt first, then tighten nut.

S-280 Web Connector

Round Sling Size (No.)	Web Slings*			Working Load Limit (Tons)†	S-280 Stock No.	Weight Each (lbs.)	Dimensions (in.)									
	Webbing Width (in.)	Eye Width (in.)	Ply				A	B	C	D	E	F	G	H	I	J
1 & 2	2	2	2	3-1/4	1021681	1.5	.75	.62	1.63	2.44	.63	.62	2.69	.56	1.19	2.02
3	3	1.5	2	4-1/2	1021690	1.9	.75	.69	1.10	2.01	.75	.69	2.19	.60	1.38	2.34
4	4	2	2	6-1/4	1021700	2.9	.75	.81	1.66	2.56	.88	.75	2.69	.69	1.62	2.46
5 & 6	6	3	2	8-1/2	1021709	5.1	1.00	.94	2.47	3.50	1.00	.88	3.69	.88	1.88	2.84

* Designed for use with Type III, (Eye & Eye), Class 7, 2 Ply web slings. For 3" and larger webbing width, tapered eye is required
 † Maximum Proof Load is 2-1/2 times the Working Load Limit. Minimum Ultimate strength is 5 times the Working Load Limit.

Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness, and effective contact width shown in the Recommended Standards Specification for Synthetic Polyester Round Slings by the Web Sling & Tie Down Association. WSTDA-RS1 (revised 2010)

 **Rigging Warehouse.com** Tel 1.877.331.3280 Fax 1.845.338.1372